



Wall bracket with cross-bar

Galileo SGL 475



Load capacity up to 140 kg




Ready for installation

Description

The wall bracket for mounting external units. It is made of galvanised sheet metal and painted with RAL 9002 polyester powders highly resistant to weathering. The wall fixing bar with teeth allows anchoring and adjustment of the distance between the bracket support arms, without them sliding during the installation phase. The supports are arranged for mounting of the condensate drain pan. Silence is obtained by dedicated vibration-damping devices on the shelves and adjustable articulated feet on the back of the arm that eliminate all the vibrations transmitted by the unit. The wall bracket is tested and certified with a static weight equal to 1.5 times that declared. Available in a single pack complete with: adjustable and articulated back feet, vibration dampers, screws, wall fixing dowels.

Technical drawing

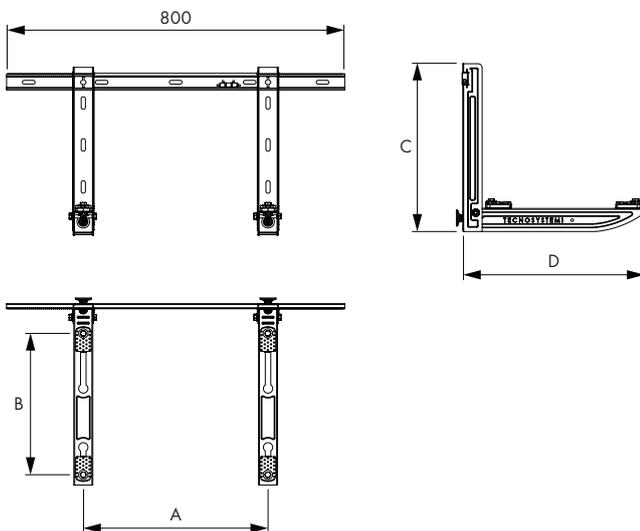

Technical specifications

- Made of electro-galvanised metal sheet
- Wall bracket with spirit level supplied
- External polyester in color RAL 9002
- Wall-mounted notched bar
- Ready for condensate drain pan
- Anti vibration "NO-SHOCK" dampers supplied
- Fixing plugs
- Adjustable rear swivel feet
- Load capacity 140 kg
- Light grey shock absorbers are mounted on the fan side (up to 60 kg)
- Dark grey shock absorbers are mounted on the compressor side (up to 120 kg)

Dimensions [mm]:

Model	A	B	C	D
Galileo SGL 475	440/745	180/385	400	475



Light grey shock absorbers are mounted on the fan side (up to 60 kg)



Dark grey shock absorbers are mounted on the compressor side (up to 120 kg)



Maximum precision of setting - notched crossbar



Reduced point load on the wall - height-adjustable rear swivel feet