


Slide-in profile PWQ

The "PWQ" slide-in profile is used to connect rectangular channels together. The specified length of the profile is applied to the connected frame profiles "PK20" or "PK30". Most often used when it is necessary to fully connect the channels along their entire frame length, and in hard-to-reach places where there is no space over the channel to put your hand in order to twist the "GCV" duct clamps.



Dimensions [mm]

Model	A	B	Length
PWQ20	20	6	5000
PWQ30	30	6	5000




Gasket PES

The "PES" gasket is used to seal the connections of rectangular ventilation ducts, polyurethane foam, dark grey colour.


Dimensions [mm]

Model	Width	Thickness	Packaging [m]
PES 10.4	10	4	100
PES 14.4	15	4	60
PES 10.7	10	7	50
PES 15.7	15	7	30



Stiffening disc STD

The STD stiffening disc is used when constructing reinforcements for ventilation ducts and rectangular fittings.

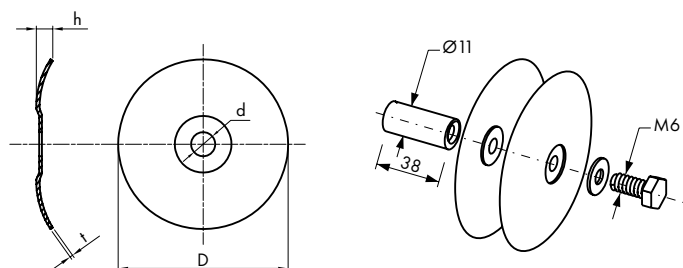


Dimensions [mm]

Typ	d	D	h	t
STD	9	65	5	0,8

Stiffening cross SSC



The SSC stiffening cross is used when creating cross-shaped reinforcements for rectangular ventilation ducts and fittings with large cross-sections. The SSC cross made of galvanized sheet metal can be used in installations requiring resistance to higher temperatures.

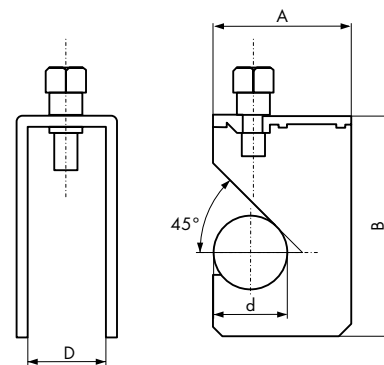

Dimensions [mm]


Type	Thickness	d	d	D	A	B
SSC	3	3/8"	18	22	40	60



Handlebar connector for rectangular fittings VF



The VF connector is designed for mounting vanes in rectangular shapes to direct the airflow. These connectors are used for mounting sheet metal with thicknesses ranging from 0.4 to 1.13 mm.

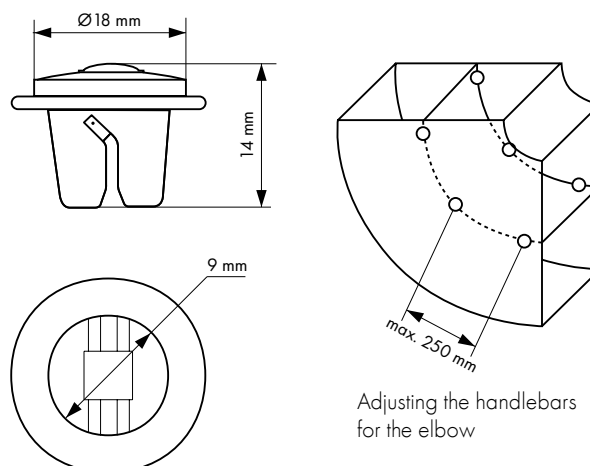

Adjusting the handlebars
for the elbow