




Steel clamp band CFS

The clamps are made of 9 mm thick stainless steel tape with specially profiled edges to prevent damage to the ducts during installation. Ideal for all flexible ducts, they ensure quick and easy installation

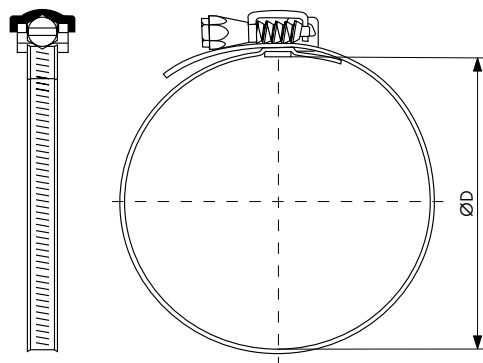

Dimensions [mm]

Model	Diameter range [mm]	Model	Diameter range [mm]
CFS-110	60 - 110	CFS-270	60 - 270
CFS-135	60 - 135	CFS-320	60 - 320
CFS-165	60 - 165	CFS-525	60 - 525



Perforated band DPH

Perforated tape to suspend ventilation ducts, made of galvanized steel.

Dimensions [mm]

Width	Thickness	Length [m]
17	0,6	25
25	0,6	25



Flange profile PK


Rectangular duct flange, galvanised. Enhances duct or fitting flange. Enables flanged assembly by "GCV" clamps or through slide-in profile.

Dimensions [mm]


Model	Height	Length
PK20	20	2500
PK20	20	5000
PK30	30	5000

Profile for rectangular duct edging with sealing mass

PK-BS




The use of PK-BS profiles with sealing mass means faster, more cost-effective installation and ensures stable tightness parameters. The flexible properties of the mass facilitate easy insertion of the sheet into the profile. The use of the sealing mass ensures high tightness of ventilation ducts.



Flange profile corner NV



Ventilation flange profile corners are made of galvanised steel, for rectangular ducts assembly.

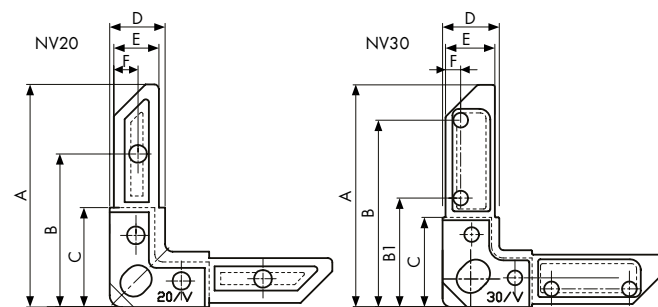


Dimensions [mm]

Model	A	B	B1	C	D	E	F
NV20	73,8	50,8	-	33	18,4	14,9	8
NV30	102,9	86,5	50,4	41,5	26,3	22,9	7

G-Clamp GCV



Ventilation galvanized steel g-clamps GCV allows a secure connection of rectangular duct edges.

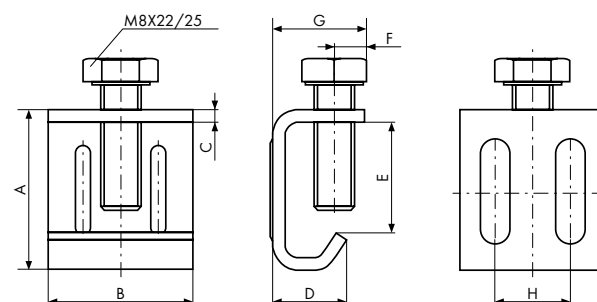

Dimensions [mm]

Model	A	B	C	D	E	F	G	H
GCV 2,5	32	28,6	2,5	15±0,5	22	6	18,3	15
GCV 3,0	32,5	29	3	15,2±0,5	21,8	7	19,5	15,5