

## Take-off with gasket ILX



Rounded, reinforced  
"SAFE" edges



Double gasket,  
tightness class D




Top quality  
galvanised steel  
275 g/m<sup>2</sup>

### Description

Take-off with gasket "ILX" **SAFE**, made from top quality galvanised steel (275 g/m<sup>2</sup>). Fully automated stamping process from one metal sheet. With every edge "SAFE" type - reinforced with curved rims, provide additional fitting rigidity and safe mounting. Double gasket EPDM clamped automatically ensures no risk of slipping during mounting.

### Technical drawing

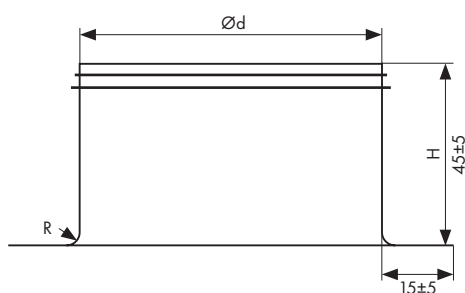

### Dimensions [mm]

Ød nom	H	R	kg	pcs/box	box type
80	40	4	0,05	100	P12
100	40	4	0,09	70	P12
125	40	4	0,11	95	P6
150	40	4	0,14	85	P6
160	40	4	0,14	100	P4
200	40	4	0,18	70	P4
250	40	4	0,23	60	P4
315	40	4	0,27	40	P4
355	40	4	0,34	32	P4
400	40	4	0,4	45	P2
450	50	4	0,6	30	P2
500	65	4	0,66	25	P2
560	65	4	0,74	25	P2
630	70	4	1,01	30	P1



Packaging method on page 38